
Noise Suppression Products/EMI Suppression Filters > For Automotive > Chip Ferrite Bead for Automotive

Data Sheet

For Automotive Chip Ferrite Bead for Automotive BLM31P Series (1206 Size)

■ Dimensions



Equivalent Circuit

(Resistance element becomes dominant at high frequencies.)

Packaging

Code	Packaging	Minimum Quantity	
L	180mm Embossed Tape	3000	
К	330mm Embossed Tape	10000	
В	Bulk(Bag)	1000	

■ Rated Value (□: packaging code)

Part Number	Impedance (at 100MHz/20°C)	Impedance (at 1GHz/20°C)	Rated Current	DC Resistance(max.)	Operating Temperature Range
BLM31PG330SH1	33ohm±25%	-	6000mA	0.01ohm	-55°C to +125°C
BLM31PG500SH1	50ohm(Typ.)	-	3000mA	0.025ohm	-55°C to +125°C
BLM31PG121SH1	120ohm±25%	-	3000mA	0.025ohm	-55°C to +125°C
BLM31PG391SH1	390ohm±25%	-	2000mA	0.05ohm	-55°C to +125°C
BLM31PG601SH1	600ohm±25%	-	1500mA	0.09ohm	-55°C to +125°C

Number of Circuits: 1

Continued on the following page.

1


This data sheet is applied for CHIP FERRITE BEAD used for Automotive Electronics equipment for your design.


A Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.





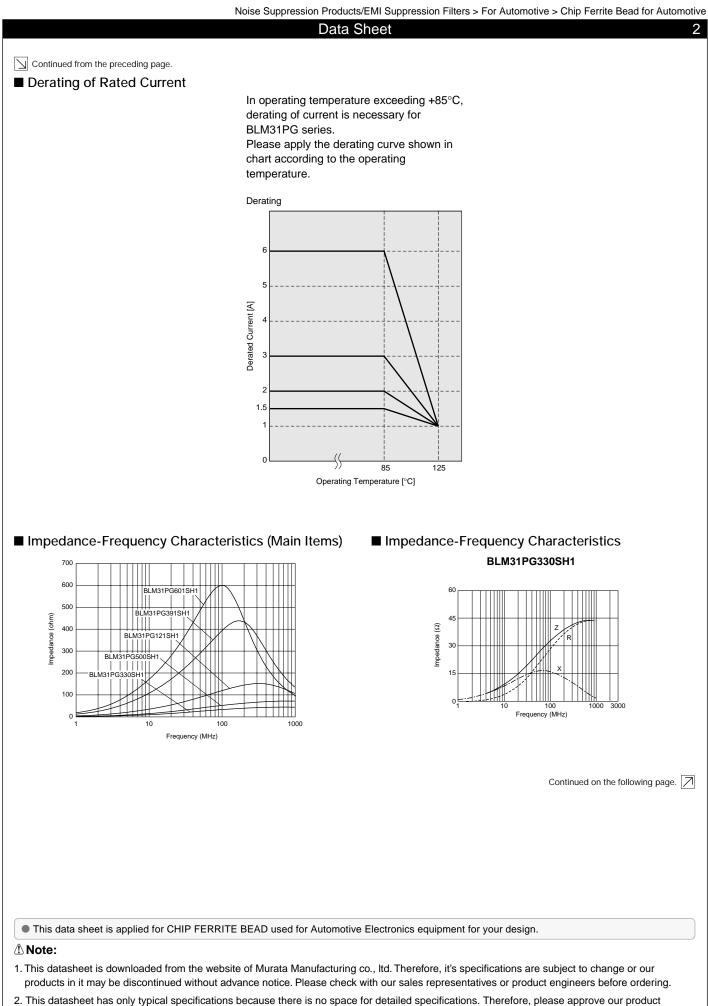

specifications or transact the approval sheet for product specifications before ordering.



