

Abundance Enterprise Co. PRODUCT SPECIFICATION

CRYSTAL RESONATOR

<u>AEC PART NUMBER / SPEC. NO:</u> <u>ZM315-32.768K-20-12.5p</u>

CUSTOMER: Schukat electronic Vertriebs GmbH





This model is ROHS/PB-free compliance according to the ROHS directive 2002/95/EC

Production Name	Crystal Resonator	
Frequency	32.768KHz	
Model No	ZM315-32.768K-20-12.5p	
Issue Date	18 th Jan, 2013	

Address: Room 602-603, Java Commercial Centre,

128 Java Road,

North Point, Hong Kong

Homepage: http://www.aeccrystal.com/

Email: sales@aeccrystal.com Telephone: (852)-28560000

Fax: (852) 25612161

Prepared	Inspection	Approved
Victor	Andy	Henkie

Product Specification	Abundance Enterprise Co.	Original Date	14/9/2006
1 Todact Specification	Abundance Enterprise Co.	PN:	ZM315

1. GENERAL PROVISION

1-1 Production Name: SMD Crystal Resonator

1-2 Holder Type: ZM315

1-3 This specification relates to the crystal resonator to be supplied by


Abundance Enterprise Co. (AEC).

2. ELECTRICAL DATA


Items	Parameters		Condition
2-1	Frequency:		32.768KHz
2-2	Load Capacitance		12.5pF
2-3	Frequency Tolerance		+/- 20 ppm
2-4	Temperature Range	Operating	(-40°C to 85°C)
	remperature Kange	Storage	(-55°C to 125°C)
2-5	Equivalent Series Res	sistance	60K ohm
2-6	Shunt Capacitance		1.8pF (typ.)
2-7	Motional Capacitance		3.0 fF (typ.)
2-8	Q-Factor		60K Typical
2-9	Parabolic Coefficient		-0.034ppm+/-0.006/(△°C)² (typ.)
2-10	Turnover Temperature	е	25℃ +/-5℃
2-11	Shock Resistance		+/-3ppm max. Natural Drop 3 Times On Hard Wooden Board From Height of 75cm.
2-12	Insulation Resistance		500 Mega Ω Min./DC 100V
2-13	Drive Level		1u Watts max.
2-14	Aging (at 25℃)		+/-5 ppm/year max.
2-15	Capacitance Ratio		450 Typical

Product Specification	Abundance Enterprise Co.	Original Date	
1 Todact Specification	Abundance Enterprise Co.	PN:	

3. DIMENSION & LAND PATTERN

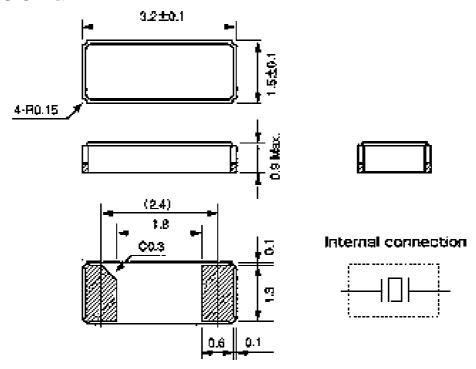

Recommended Soldering Pads

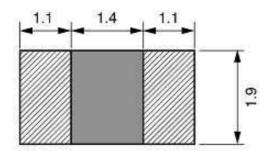


Unit: mm

	6	NO.	REVISED DATE	MODIFY CONTENTS
AEC		1	2006.10.4	ORIGINAL
Abundance Enterprise Co.				
DIMENTION	mm			
SCALE		MODEL		ZM315 PAD AND PRODUCT DIMENTION
TOLERANCE	±0.2		PART NAME	ZM-315

14/9/2006 ZM315

Product Specification	Abundance Enterprise Co.	Original Date	14/9/2006	
1 Toduct Specification	Abundance Enterprise Co.	PN:	ZM315	1

4. Soldering Condition

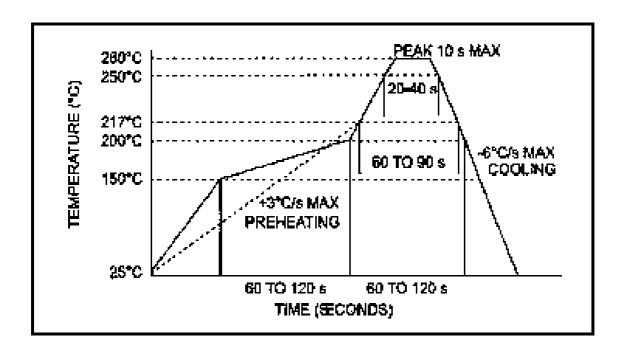

Product Specification	Abundance Enterprise Co.	Original Date	14/9/2006
Troduct Specification	Abundance Enterprise Co.	PN:	ZM315

5. Testing standard

- 5.1.1 Lot Classification: If the quantity is 1000pcs or more, 1000pcs is one lot
- 5.1.2 Sampling Test method: MIL-STD- 105E G-II
- 5.1.3 Test Level
 - A) High Level Defect: AQL 0.065% [200pcs]
 - B) Medium Level Defect: AQL 0.25% [50pcs]
 - C) Low Level Defect: AQL 0.4%[32pcs]
- 5.1.4 Defect Classification
 - A) High Level
 - i)NO Frequency
 - ii)MIXING
 - iii)Leak Defect
 - B) Medium Level- Electrical Characteristic Defect
 - i) Frequency
 - ii) Oscillation
 - iii) Electrical Current
 - iv) Other Electrical Characteristics Defect
 - C) Visual
 - i) Marking
 - ii) Welding
 - iii) Leads
 - iv) other visual defect

Testing method and its standard can be modified depending on the customer's request.

Product Specification	ct Specification Abundance Enterprise Co.	Original Date	14/9/2006
1 Toduct Specification	Abundance Enterprise Co.	PN:	ZM315

6. Reliability Test Standard- Environmental

		
Test Item	Testing procedure and Conditions	Evaluation
1.Thermal	1. The test should be performed in accordance with	The Crystal unit should
stock Test	the following condition for 10 cycle.	fulfill the specified
		requirements of the
	2. The crystal unit should be kept in room	electrical characteristics
	temperature for 1 hour then tested.	and appearance.
2. Humidity	1.Temperature: +40 °C +/-2 °C	The Crystal unit should
	Relative humidity: 90~95%	fulfill the specified
	Test period: 48 hours	requirements of the
		electrical characteristics
	2. The crystal unit should be kept in room	and appearance
	temperature for 1 hour then tested.	
3. Cold	1.Temperature: -40 °C +/-2 °C	The Crystal unit should
Temperature	Test period: 2 hours	fulfill the specified
Test		requirements of the
	2. The crystal unit should be kept in room	electrical characteristics
	temperature for 1 hour then tested.	and appearance
4. Thermal Test	1.Temperature: +85 °C +/-2 °C	The Crystal unit should
	Test period: 24 hours	fulfill the specified requirements of the
	2. The crystal unit should be kept in room	electrical characteristics
	temperature for 1 hour then tested.	and appearance
5. Rapid change	1.Temperature: +85 °C +/-2 °C	The Crystal unit should
in Temperature		fulfill the specified
	Test period: 48 hours	requirements of the
	2. The crystal unit should be kept in room	electrical characteristics
	temperature for 1 hour then tested.	and appearance

Product Specification	Abundance Enterprise Co.	Original Date	14/9/2006
1 Toduct Specification	Abundance Enterprise Co.	PN:	ZM315

7. Reliability Test Standard- Mechanical.

Test Item	Testing procedure and Conditions	Evaluation
1. Lead Tension	1. Fix the unit	Should pass
	2. Apply 2LB of Weight Axis to the leads	sealing and
	3. Time: 5 Seconds.	visual test.
2. Lead bending	1. Attach 1 LB of Weight to each of the leads	Should pass
	2. Bending Angle 90° (From the normal position to 45°	sealing and
	opposite direction	visual test.
	3. Bending Time: 3 Seconds(Each direction)	
	4. Number of bending: 2 Times	
3. Leads	1. Dip the leads into flux (Rojin Methanol) for 5 seconds.	Should pass
Solder ability	2. Dip the leads into 250 +/- 5°C 99% Sn Dipping solution	sealing and
	for 5 seconds.	visual test.
4. Soldering	1.Perform Electrical	Should pass
heat resistance	Characteristics Test before starting this procedure.	sealing and
test	2. Dip the leads into flux (Rojin methanol) for 5 seconds.	visual test.
	3. Dip the leads into 260 +/- 5° C 99% Sn Dipping solution	
	for 5 seconds.	
	4. Take the unit out, store at room temperature for 30	
	seconds then measure the electrical characteristics.	
5 Vibration	1.Perform electrical characteristics test before starting this	Should pass
	procedure.	sealing and
	2. The unit should be fixed onto a vibrating machine and	visual test.
	then shaken X, Y, Z Directions.	
	Vibration frequency: 10~55Hz	
	Amplitude: 0.03 inch	
	Factor time: 1 minutes	
	Testing Time: 30 minutes each for X, Y, Z directions	
6. Drop Test	1.Perform Electrical characteristics test before starting this	Should pass
	procedure.	sealing and
	2. From the height of 500mm drop the unit 3 times onto a	visual test.
	hard rubber surface.	
7 Leak test	USE helium Leak detector.	GAS or Air
	Bombing pressure: 5kg/cm ²	should not be
	Leak should be less than 1E- 8atm.cc/sec.	detected.
8. Marking	Submerge the unit into IPA [ISOPROPYL ALCOHOL]	Marking should
erase	Solution for 10 Minutes and Brush the marking 10 times	not be erased.
	with a tooth brush.	

Product Specification	Abundance Enterprise Co.	Original Date	14/9/2006
		PN:	ZM315

8. Caution

In order to maintain quality, without change in characteristics of the crystal unit, please follow below recommendation

8.1 Shock

8.1.1 ALL crystal units have a thin crystal blanks within. If it is dropped above the recommended dropping height (500mm). The specific characteristics and appearance can be changed. Please pay special attention to external shock.

8.2 Environment.

- 8.2.1 Crystal units frequency can be changed due to surrounding temperature. If it is stored next to a high temperature heater (above $+85^{\circ}$ C) or below 40° C. And a strong light source for long period of time, the electrical characteristics can be changed. It is suggested that these environments can be avoided.
- 8.2.2 If the unit is placed in a humid environment, lead terminal can be damaged; therefore, do not store the crystal units in humid environment.
- 8.2.3 Crystal unit has vibrating characteristics. If it is placed where vibration exists, the operating characteristics can be altered; therefore, this environment should be avoided.

8.3 Lead

- 8.3.1 If the leads are bent 90° from its axis for more than 2 times the terminal could be disconnected; therefore, do not bent the leads excessively.
- 8.3.2 After soldering crystal units into a PCB, impacting the unit form the top, bottom, left or right side of the unit can shatter the glass portion of the base, rendering the unit useless.

8.4 Assembly method

- 8.4.1 Correct ultrasonic frequency for cleaning should be less than 20KHz.
- 8.4.2 Soldering should be done using IEC 61760-1 or PB- Free products.

8.5 Storage

8.5.1 If the crystal units are stored in humid or salty environment.

Appearance can be changed and solder ability can be deteriorate; therefore, avoid storing in such environment, do not store the crystal unit more than 3 months.