

# POWER RELAY

## 1 POLE - 3A/5A Slim Type Relay

### FTR-F3 Series

#### ■ FEATURES

- High density mounting  
Slim type with 7mm width and 142mm<sup>2</sup> mounting space
- High insulation  
Insulation distance: minimum 6mm between coil and contact (conforms to IEC 60065)  
Dielectric strength: 4KV  
Surge strength: 10KV
- Cadmium free contact for eco-program
- Safety standards  
UL, CSA, VDE, SEMKO, CQC
- Plastic sealed relay, RTIII
- RoHS compliant  
Please see page 6 for more information



#### ■ PARTNUMBER INFORMATION

[Example]       $\frac{\text{FTR-F3}}{\text{(a)}}$      $\frac{\text{A}}{\text{(b)}}$      $\frac{\text{A}}{\text{(c)}}$      $\frac{\text{012}}{\text{(d)}}$      $\frac{\text{E}}{\text{(e)}}$     -     $\frac{\text{HA}}{\text{(f)}}$

(a)	Relay type	FTR-F3	:FTR-F3-Series
(b)	Contact configuration	A	: 1 form A (SPST-NO)
(c)	Coil type (power)	A	: 200mW
(d)	Coil rated voltage	012	: 5.....24 VDC Coil rating table at page 3
(e)	Contact material	E	: AgNi
(f)	Contact rating	Nil HA KS	: 3A type : 5A type sealing confirmed : 3A type sealing confirmed

Actual marking does not carry the type name : "FTR"

E.g.: Ordering code: FTR-F3AA012E-HA

Actual marking: F3AA012E

5A 250V~ 5A 30VDC marked on relay

# FTR-F3 SERIES

## ■ SPECIFICATION

Item	FTR-F3		
	FTR-F3AA( )E		FTR-F3AA( )E-HA
Contact Data	Configuration	1 form A (SPST-NO)	
	Construction	Single	
	Material	AgNi	
	Resistance (initial)	Max. 100mOhm at 1A, 6VDC	
	Contact rating (resistive)	3A, 125VAC, 30VDC	5A, 250VAC, 30VDC
	Max. carrying current	5A	
	Max. switching voltage	277VAC, 30VDC	
	Max. switching power	750VA, 90W	1,250VA, 150W
	Min. switching load *	10 mA, 5VDC	
Life	Mechanical	Min. 5 x 10 <sup>6</sup> operations	
	Electrical (at rated load)	Min. 200 x 10 <sup>3</sup> operations	Min. 100 x 10 <sup>3</sup> operations
Coil Data	Rated power (20 °C)	200mW	
	Operate power	113mW	
	Operating temperature range	-40 °C to +70 °C (no frost)	
Timing Data	Operate (at nominal voltage)	Max. 10ms (without bounce, no diode)	
	Release (at nominal voltage)	Max. 10ms (without bounce, no diode)	
Insulation	Resistance (initial)	Min. 1,000MOhm at 500VDC	
	Dielectric strength	Open contacts	750VAC (50/60Hz) 1min
		Contacts to coil	4,000VAC (50/60Hz) 1min
	Surge strength	Contacts to coil	10,000V / 1.2 x 50µs standard wave
	Clearance	6mm	
	Creepage	6mm	
	EN61810-1, VDE0435	Voltage	250V
Pollution degree		2	
Material group		III	
Other	Vibration resistance	Misoperation	10 to 55Hz double amplitude 1.5mm
		Endurance	10 to 55Hz double amplitude 1.5mm
	Shock	Misoperation	Min. 100m/s <sup>2</sup> (11±1ms)
		Endurance	Min. 1,000m/s <sup>2</sup> (6±1ms)
	Weight	Approximately 4g	
	Sealing	Plastic sealed RTIII	

\* Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

## ■ COIL RATING

200mW type

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release Voltage (VDC) *	Max. Coil Voltage (VDC)	Rated Power (mW)
005	5	125	3.75	0.5	12	200
006	6	180	4.5	0.6	14.4	
009	9	405	6.75	0.9	21.6	
012	12	720	9	1.2	28.8	
018	18	1,620	13.5	1.8	43.2	
024	24	2,880	18	2.4	57.6	







Note: All values in the tables are valid for 20°C and zero contact current.

\* Specified operate values are valid for pulse wave voltage.



## ■ SAFETY STANDARDS

Type	Compliance	Contact rating	
		FTR-F3	FTR-F3-HA
UL	UL 508	Flammability: UL 94-V0 (plastics)	
	E63614	3A, 30 VDC/ 277 VAC (resistive) 1/10 HP, 250VAC /125VAC	5A, 30 VDC/ 277 VAC (resistive) 1/10 HP, 250VAC /125VAC
CSA	C22.2 No. 14 LR 40304	1/8 HP, 277VAC Pilot duty: D300	1/8 HP, 277VAC Pilot duty: D300
VDE	0435 40015024	3A, 250 VAC, $\cos\phi = 1$ , $200 \times 10^3$ , 85°C	5A, 250 VAC, $\cos\phi = 1$ , $100 \times 10^3$ , 85°C
		3A, 30 VDC, $\tau=0\text{msec}$ , $200 \times 10^3$ , 85°C	5A, 30 VDC, $\tau=0\text{msec}$ , $100 \times 10^3$ , 85°C
		4A, 250VAC, cut off 1A, $\cos\phi = 0.8$ , $200 \times 10^3$ , 70°C	4A, 250VAC, cut off 1A, $\cos\phi = 0.8$ , $100 \times 10^3$ , 70°C
SEMKO	EN 61058-1: 1992 +A1:1993 EN 61095:1993+A11	5A, 250 VAC 40T70	

## CHARACTERISTIC DATA

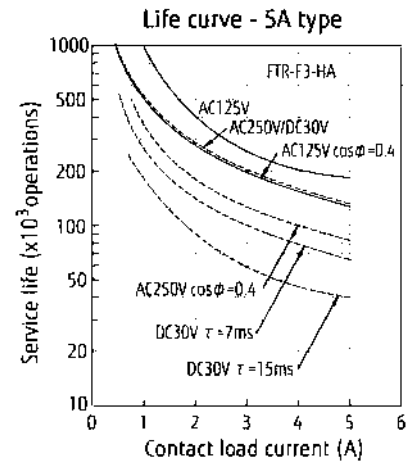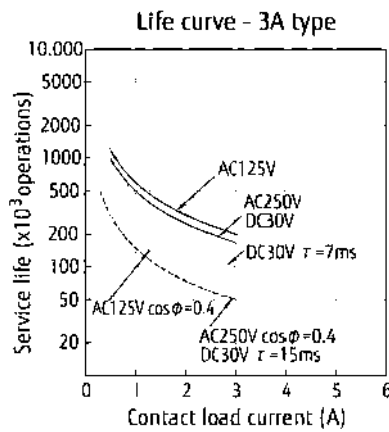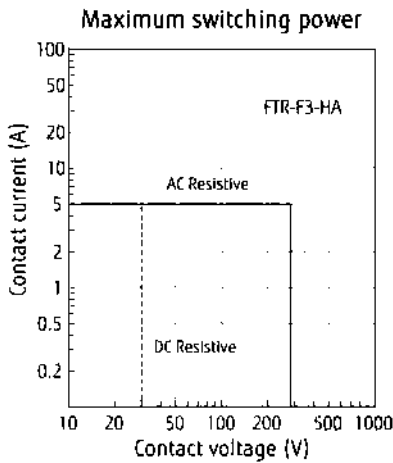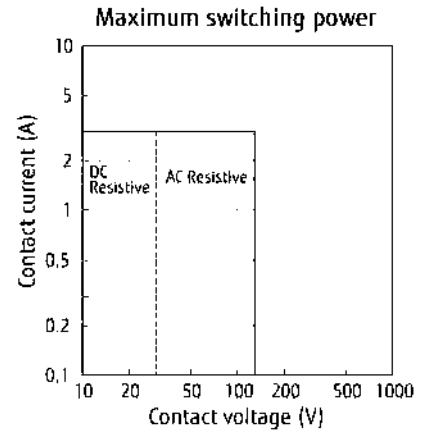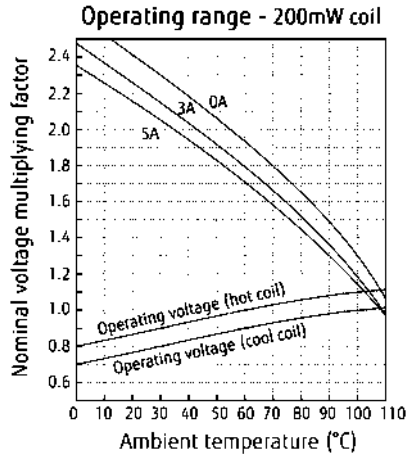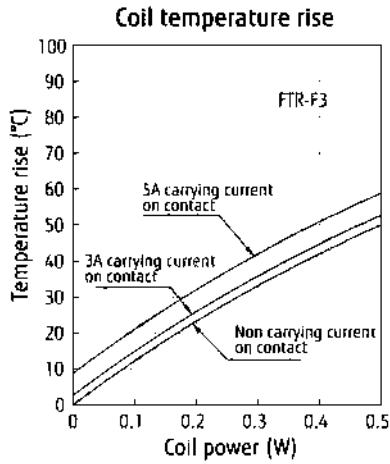

## REFERENCE DATA

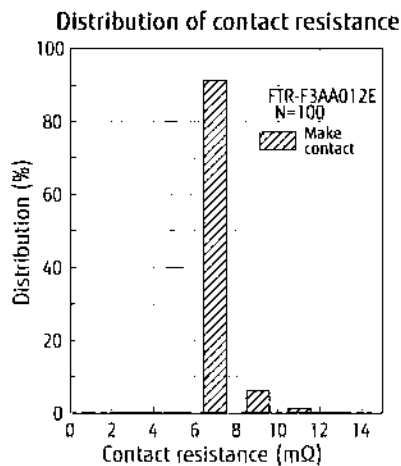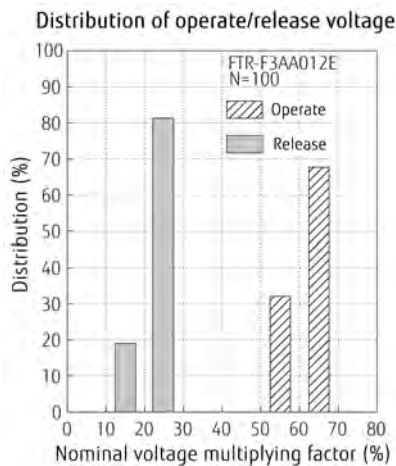


# FTR-F3 SERIES


## ■ DIMENSIONS

Standard type


### ● Dimensions

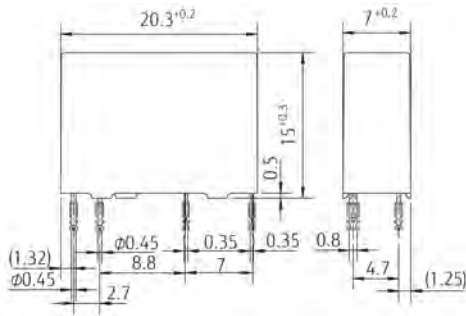

### ● Schematics (BOTTOM VIEW)



### ● PC board mounting hole layout (BOTTOM VIEW)

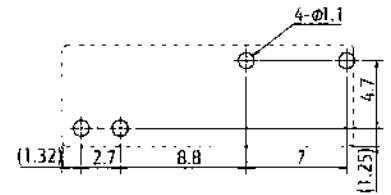

Unit: mm

## RoHS Compliance and Lead Free Information

### 1. General Information

- All signal and power relays produced by Fujitsu Components are compliant with RoHS directive 2002/95EC including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives on October 21st, 2005. (Amendment to Directive 2002/95/EC)
- All of our signal and power relays are lead-free. Please refer to Lead-Free Status Info for older date codes at: <http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.

### 2. Recommended Lead Free Solder Profile

- **Recommended solder Sn-3.0Ag-0.5Cu.**

**Flow Solder condition:**

Pre-heating: maximum 120°C  
Soldering: dip within 5 sec. at  
260°C solder bath

**Solder by Soldering Iron:**

Soldering Iron  
Temperature: maximum 360°C  
Duration: maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [components@us.fujitsu.com](mailto:components@us.fujitsu.com)  
Web: <http://us.fujitsu.com/components>

### Europe

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: [emea.fujitsu.com/components/](http://emea.fujitsu.com/components/)

### Asia Pacific

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#01-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcalfcal.fujitsu.com](mailto:fcalfcal.fujitsu.com)  
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2013 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. January 04, 2013