

CapXon KM Series

KM Series Standard 105°C

Features

- ◆ Used in communication equipments, switching power supply, etc.
- ◆ Safety vent construction design.
- ◆ For detail specifications, please refer to Engineering Bulletin No. E102



Specifications

Item	Performance Characteristics									
Operating Temperature Range	-40 to +105°C	-25 to +105°C								
Rated Voltage Range	6.3 to 100 VDC	160 to 450 VDC								
Capacitance Range	0.1 to 22000 µF	0.47 to 470 µF								
Capacitance Tolerance	±20% (120Hz, +20°C)									
Leakage Current(+20°C, max)	$I \leq 0.01 \text{ CV or } 3 (\mu\text{A})$ After 1 minute whichever is greater measured with rated working voltage applied.	$I \leq 0.03 \text{ CV } (\mu\text{A})$ After 1 minute with rated working voltage applied.								
Dissipation Factor(tan δ)	(+20°C, at 120Hz)	Working Voltage(VDC)	6.3	10	16	25	35	50	63	100
		D.F. (%)max.	22	17	15	14	12	10	9	8
		Working Voltage(VDC)	160	200	250	350	400	450		
		D.F. (%)max.	12	12	12	15	15	17		
		For capacitance > 1000 µF, add 2% per another 1000 µF.								
Low Temperature Characteristics (120Hz)	Impedance ratio max.	Working Voltage(VDC)	6.3	10	16	25	35	50	63	100
		Z-25°C / Z+20°C	4	3	2	2	2	2	2	2
		Z-40°C / Z+20°C	8	6	4	3	3	3	3	3
		Working Voltage(VDC)	160	200	250	350	400	450		
		For Capacitance > 1000 µF, add 0.5 per another 1000 µF for -25°C / +20°C add 1 per another 1000 µF for -40°C / +20°C								
Load Life	Test conditions Duration time :2000Hrs Ambient temperature :+105°C Applied voltage :Rated DC working voltage After test requirements at +20°C Capacitance change :≤ ±20% of the initial measured value Dissipation factor :≤ 200% of the initial specified value Leakage current :≤ The initial specified value									
Shelf Life	Test conditions Duration time :1000Hrs Ambient temperature :+105°C Applied voltage :None After test requirements at +20°C:Same limits as Load life. Pre-treatment for measurements shall be conducted after application of DC working voltage for 30 minutes.									


Multiplier for Ripple Current vs. Frequency

CAP(µF) \ Frequency(Hz)	50(60)	120	400	1K	10K	50K-100K
CAP ≤ 10	0.8	1	1.30	1.45	1.65	1.70
10 < CAP ≤ 100	0.8	1	1.23	1.36	1.48	1.53
100 < CAP ≤ 1000	0.8	1	1.16	1.25	1.35	1.38
1000 < CAP	0.8	1	1.11	1.17	1.25	1.28

Multiplier for Ripple Current vs. Temperature

Temperature(°C)	45	60	70	85	105
Multiplier	2.10	1.90	1.40	1.25	1.00

Diagram of Dimensions:(unit:mm)

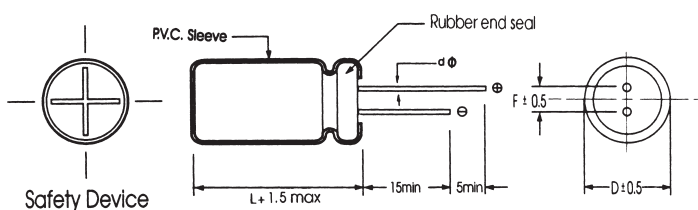

D ψ	5	6.3	8	10	13	16	18	22
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10
d ψ	0.5			0.6		0.8		

CapXon KM Series

Case Size

φ DxD(mm)

WV (SV) μF	6.3 (8)		10 (13)		16 (20)		25 (32)		35 (44)	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
4.7							5x11	26	5x11	28
6.8							5x11	35	5x11	38
10					5x11	35	5x11	38	5x11	41
22			5x11	48	5x11	54	5x11	58	5x11	61
33	5x11	54	5x11	60	5x11	64	5x11	69	5x11	75
47	5x11	65	5x11	70	5x11	100	5x11	105	5x11	110
68	5x11	75	5x11	80	5x11	105	6.3x11	120	6.3x11	140
100	5x11	96	5x11	105	5x11	105	6.3x11	145	6.3x11	160
					6.3x11	130			8x11.5	175
120	5x11	110	5x11	120	6.3x11	145	6.3x11	175	8x11.5	185
150	5x11	120	6.3x11	145	6.3x11	170	6.3x11	200	8x11.5	215
180	6.3x11	140	6.3x11	160	8x11.5	190	8x11.5	210	10x12.5	265
220	6.3x11	160	6.3x11	175	6.3x11	215	8x11.5	235	10x12.5	300
330	6.3x11	195	8x11.5	255	8x11.5	265	8x11.5	310	10x12.5	400
							10x12.5	335		
470	8x11.5	270	8x11.5	290	8x11.5	370	8x11.5	410	10x16	520
							10x12.5	440		
560	8x11.5	310	8x11.5	330	10x12.5	410	10x16	460	10x20	540
680	8x11.5	360	10x12.5	420	10x12.5	480	10x16	520	13x20	650
820	8x11.5	390	10x12.5	480	10x16	550	10x20	640	13x20	760
1000	10x12.5	430	10x12.5	520	10x16	590	10x20	710	13x20	830
1200	10x12.5	550	10x16	630	10x20	700	13x20	810	13x25	900
1500	10x16	620	10x16	770	10x20	820	13x20	900	16x25	960
1800	10x20	710	10x20	820	13x20	920	13x20	1050	16x25	1150
2200	10x20	770	10x20	860	13x20	1000	13x25	1200	16x25	1290
									16x31.5	1350
2700	10x20	850	13x20	920	13x20	1080	16x25	1320	16x31.5	1480
3300	13x20	960	13x20	1100	13x25	1200	16x25	1460	16x35.5	1650
3900	13x20	1000	13x20	1280	16x25	1490	16x31.5	1670	18x31.5	1820
4700	13x20	1150	13x25	1350	16x25	1600	16x35.5	1780	18x35.5	1900
5600	13x25	1300	16x25	1490	16x31.5	1720	16x35.5	1890	18x35.5	2000
6800	13x25	1450	16x25	1670	16x31.5	1870	18x35.5	2050		
8200	16x25	1520	16x31.5	1840	16x35.5	1950	18x35.5	2090		
10000	16x25	1680	16x35.5	1900	18x35.5	2060				
12000	16x31.5	1750	16x35.5	2050	18x35.5	2150				
15000	16x35.5	2075	18x35.5	2180						
18000	18x31.5	2150	18x35.5	2205						
22000	18x41	2300								

Ripple Current (mA, rms) at 105°C 120Hz

CapXon KM Series

φ DxL(mm)

WV (SV) μF	50 (63)		63 (79)		100 (125)		160 (200)		200 (250)	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1	5x11	1.3	5x11	1.3	5x11	1.9				
0.22	5x11	2.9	5x11	2.9	5x11	3.4				
0.33	5x11	4	5x11	4.5	5x11	5				
0.47	5x11	7	5x11	7	5x11	10	5x11	11	5x11	12
1	5x11	13	5x11	13	5x11	15	6.3x11	17	6.3x11	17
2.2	5x11	20	5x11	20	5x11	21	6.3x11	25	6.3x11	25
3.3	5x11	26	5x11	28	5x11	30	6.3x11	32	8x11.5	35
4.7	5x11	32	5x11	32	5x11	35	6.3x11	35	8x11.5	50
6.8	5x11	40	5x11	40	6.3x11	47	8x11.5	56	10x12.5	63
10	5x11	48	5x11	48	6.3x11	56	10x12.5	75	10x12.5	78
22	5x11	72	6.3x11	82	8x11.5	96	10x16	105	10x16	125
									10x20	130
33	6.3x11	90	6.3x11	100	8x11.5	140	10x20	170	13x20	190
					10x12.5	155				
47	6.3x11	115	8x11.5	140	10x12.5	170	13x20	210	13x20	220
68	8x11.5	155	8x11.5	185	10x16	240	13x20	280	13x25	300
82									16x25	360
100	8x11.5	200	10x12.5	230	10x20	280	13x25	310	16x25	345
120	10x12.5	210	10x16	255	10x20	295	16x25	350	16x31.5	360
150	10x12.5	245	10x16	270	13x20	360	16x25	470	16x31.5	480
180	10x12.5	280	10x16	310	13x20	480	16x25	550	16x35.5	550
220	10x16	360	10x16	375	13x20	520	16x31.5	580	16x35.5	520
			10x20	400					18x31.5	550
330	10x16	450	13x20	580	16x25	690	18x35.5	705	18x35.5	650
	10x20	470							18x41	670
470	10x20	600	13x20	690	16x25	820	18x41	860	22x41	790
	13x20	650			16x31.5	860				
560	13x20	660	13x25	770	16x35.5	880				
680	13x25	770	16x25	880	16x35.5	920				
					18x31.5	950				
820	13x25	850	16x25	920	18x35.5	970				
1000	16x25	1000	16x31.5	1185	18x41	1200				
1200	16x25	1150	16x35.5	1200						
1500	16x31.5	1300	18x31.5	1350						
1800	16x35.5	1480								
2200	16x35.5	1530								
2700	18x35.5	1590								
3300	18x35.5	1750								

Ripple Current (mA, rms) at 105°C 120Hz

CapXon KM Series

φ DxL(mm)

WV (SV) μF	250 (300)		350 (400)		400 (450)		450 (500)	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.47	5x11	12	6.3x11	13	6.3x11	14	6.3x11	14
1	6.3x11	16	6.3x11	16	8x11.5	20	8x11.5	20
2.2	8x11.5	25	8x11.5	31	8x11.5	36	10x12.5	35
3.3	8x11.5	38	8x11.5	38	10x12.5	47	10x12.5	31
							10x16	40
4.7	8x11.5	46	10x12.5	52	10x12.5	65	10x16	45
	10x12.5	50						
6.8	10x12.5	70	10x12.5	79	10x16	90	10x20	72
10	10x12.5	82	10x16	92	10x20	125	10x20	92
	10x16	88					13x20	98
22	10x20	140	13x20	160	13x20	170	13x25	180
	13x20	152		170	13x25	190		
33	13x20	190	13x25	200	13x25	260	16x25	210
				225				
47	13x20	240	16x25	260	16x25	300	16x31.5	320
					16x31.5	360	16x35.5	380
56	13x25	280	16x25	300	16x31.5	400	16x35.5	380
68	16x25	355	16x31.5	320	16x35.5	480	18x35.5	470
					18x31.5	500		
82	16x25	370	16x35.5	350	18x31.5	520	18x35.5	480
100	16x31.5	395	18x35.5	390	18x35.5	550	18x41	560
120	16x35.5	370	18x35.5	400	18x35.5	580	22x41	650
					18x41	620		
150	16x35.5	460	18x41	420	18x41	650		
180	18x35.5	470	18x41	430	18x45	700		
220	18x35.5	650	22x41	500				
	18x41	700						
330	22x41	780						

Ripple Current (mA, rms) at 105°C 120Hz