


## ■ FEATURES

- SPDT (1 Form C) suitable for medium current rating at 2 Amps
- Small size (15.5\*10.5\*10.9mm)
- Power consumption of standard type 360mW and high sensitivity type 200mW
- DIL terminal
- Application: OA equipment, Security alarm system
- UL File No. E147052
- CSA File No. LR76479-1

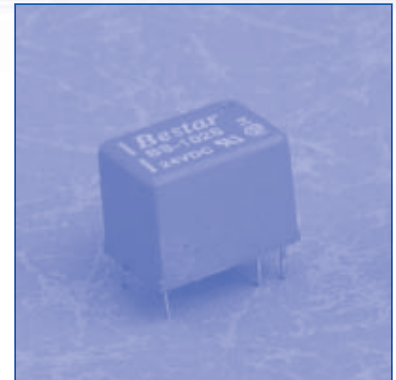

## ■ COIL RATING (at 20 °C)

Model No.	Nominal Voltage (VDC)	Coil Resistance ( $\Omega \pm 10\%$ )	Nominal Current (mA)	Pick-Up Voltage (VDC)	Drop-Out Voltage (VDC)	Power(mW) Consumption
BS-102	3	25	120	2.25	0.3	360
	5	70	72	3.75	0.5	
	6	100	60	4.50	0.6	
	9	220	40	6.75	0.9	
	12	400	30	9.00	1.2	
	24	1600	15	18.00	2.4	
BS-102B	3	45	66.7	2.25	0.3	200
	5	120	41.7	3.75	0.5	
	6	180	33.3	4.50	0.6	
	9	400	22.5	6.75	0.9	
	12	700	17.1	9.00	1.2	
	24	2800	8.6	18.00	2.4	

## ■ ORDERING INFORMATION

**BS-102 B S-12VDC**

Coil Sensitivity	Protection	Coil Voltage
Nil: Standard 360mW B: High Sensitivity 200mW	Nil: Flux Free S: Sealed	See Coil Rating

## ■ SPECIFICATIONS

Model No.	BS-102	BS-102B
Contact Arrangement	1 Form C	
Contact Material	Ag Alloy	
Contact Rating(at Resistive Load)	2A 24VDC 2A 120VAC	
Max. Switching Voltage	240VAC, 60VDC	
Max. Switching Current	2A	
Min. Switching Load	100mA 5VDC	
Contact Resistance	Max. 100mΩ (initial)	
Insulation Resistance	Min. 100MΩ at 500VDC	
Dielectric Strength		
Between Coil & Contact	700 VAC (1 minute)	
Between Contacts	700 VAC (1 minute)	
Surge Strength	1000V	
Operate Time	Max. 7mSec.	Max. 10mSec.
Release Time	Max. 6mSec.	
Ambient Temperature	-25 °C ~ + 50 °C	
Vibration Resistance (Endurance)	1.5mm D.A. 10-55HZ	
Shock Resistance	Min. 10G Unerror	
Mechanical Life	1 x 10 <sup>7</sup> operations (at no load)	
Electrical Life	1 x 10 <sup>5</sup> operations (at rated load)	
Weight	Approx. 3.5g	

