



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DLE-033-780 REV: 1.0

5.0mm Bi-Color (Multi-Color)With common Cathode(0.1"Lead Pitch)LEDs,T-1 3/4

MODEL NO : 339-1SURSYGW/S530-A2 ECN : _____ Page: 1/5

■ Features :

- Two chips are matched for uniform light output, wide viewing angle
- Long life-solid state reliability
- I.C. compatible/Low power consuming


■ Description :

- The 339-1 LED lamp contain two integral chips and are available as both bicolor and bipolar types.
- The Hyper Red and Super Yellow Green Light is emitted by diodes of AlGaInP and AlGaInP respectively.
- Type of bipolar lamps are both white diffused and color diffused while the bicolor are white diffused.

■ Applications :

- TV set
- Monitor
- Telephone
- Computer

■ Package Dimension:

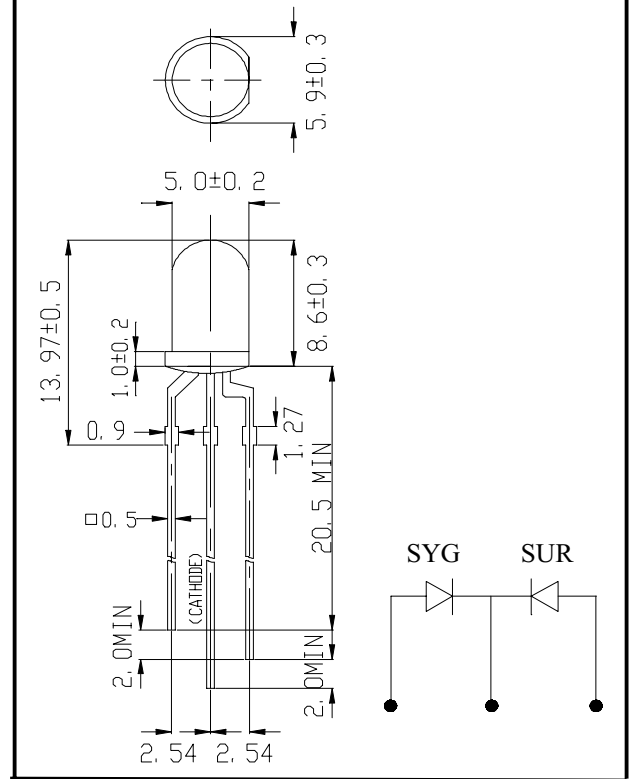

■ NOTES :

- 1.All dimensions are millimeters.
- 2.An epoxy meniscus may extend about is 1.5mm(0.059") down the lead.

PART NO	CHIP		Lens Color
	Material	Emitted Color	
339-1SURSYGW/S530-A2	AlGaInP	Hyper Red	White Diffused
	AlGaInP	Super Yellow Green	

DESIGNER	CHECKER	APPROVER

Office : NO 25,Lane 76,Chung Yang Rd,Sec.3
Tucheng,Taipei 236,Taiwan,R.O.C.

TEL : 886-2-2267-2000,2266-9936(22 Lines)
FAX : 886-2-2267-6189



EVERLIGHT ELECTRONICS CO.,LTD.







Device Number : DLE-033-780 REV: 1.0

5.0mm Bi-Color (Multi-Color)With common Cathode(0.1"Lead Pitch)LEDs,T-1 3/4

MODEL NO : 339-1SURSYGW/S530-A2 ECN : _____ Page: 3/5

■ Typical Electro-Optical Characteristic Curves

SUR

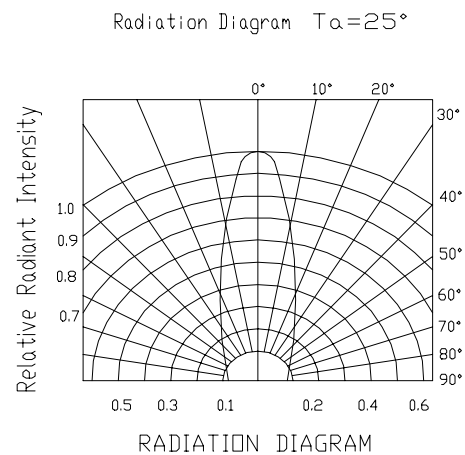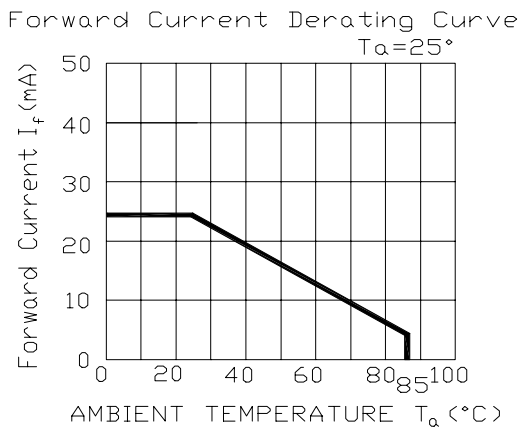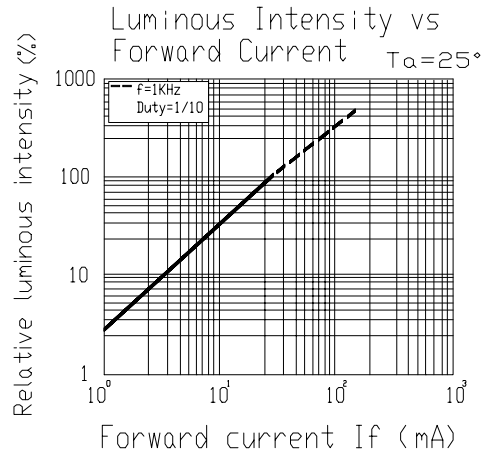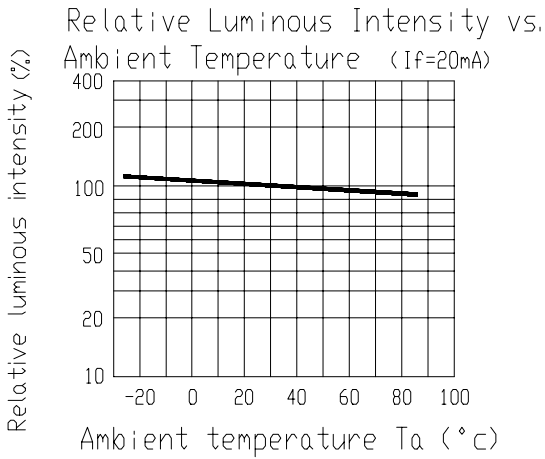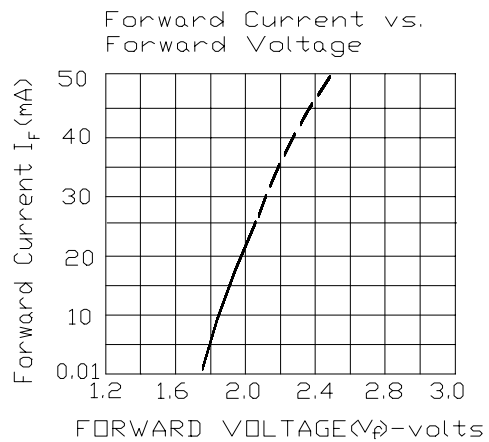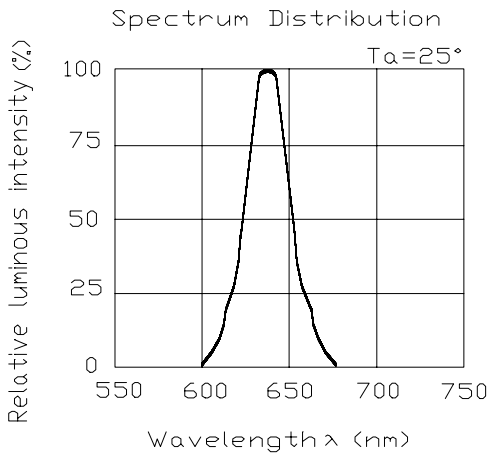



EVERLIGHT ELECTRONICS CO.,LTD.







Device Number : DLE-033-780 REV: 1.0

5.0mm Bi-Color (Multi-Color)With common Cathode(0.1"Lead Pitch)LEDs,T-1 3/4

MODEL NO : 339-1SURSYGW/S530-A2 ECN : _____ Page: 4/5

■ Typical Electro-Optical Characteristic Curves

SYG

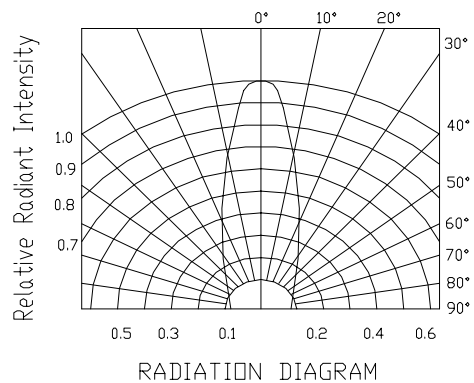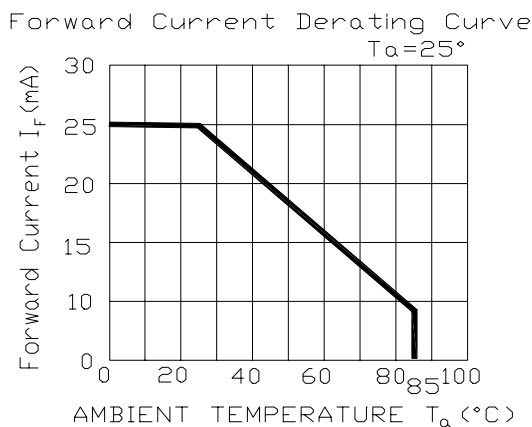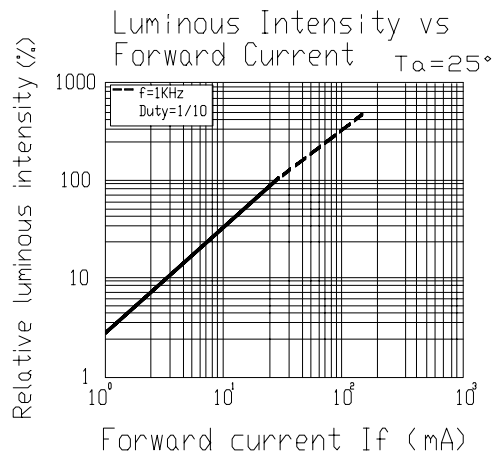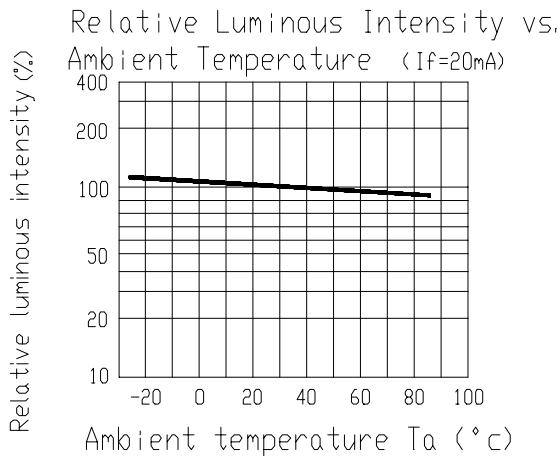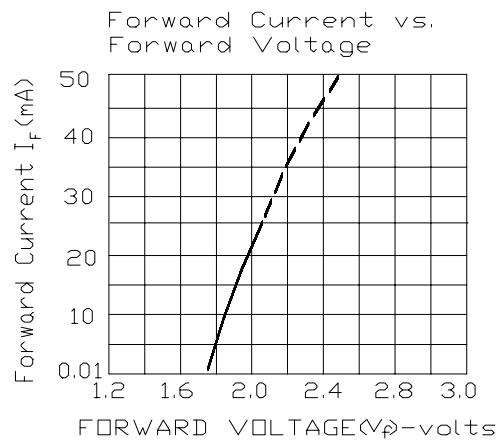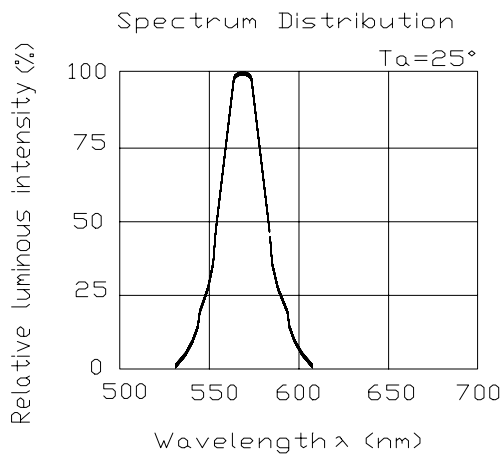



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DLE-033-780 REV: 1.0

5.0mm Bi-Color (Multi-Color)With common Cathode(0.1"Lead Pitch)LEDs,T-1 3/4

MODEL NO : 339-1SURSYGW/S530-A2 ECN : _____ Page: 5/5

■ Reliability test item and condition

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 Pcs	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 Pcs	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 Pcs	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 Pcs	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 Pcs	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 Pcs	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 Pcs	0/1