



PC20BU


PC – Printed Circuit Terminals



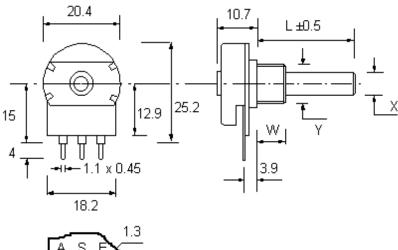



SPINDLE END VIEW



Total mechanical and effective electrical angles of rotation of potentiometers without rotary switch

- W Mounting Height
- Y Mounting Diameter
- X Spindle Diameter
- L Spindle Length
- A Initial Termination
- S Wiper (or moving contact) termination
- E End Termination

This information is supplied in good faith but the customer is politely reminded that it is their responsibility to check the suitability of our products for their particular application, production techniques and processes. Please note that all dimensions are for reference purposes only and, as it is the Company's policy to continuously improve our products, we reserve the right to incorporate changes without notice. Please read our terms and conditions before purchasing our products. Published 01-04- 2018



P20 Range Technical Data

Life Expectancy of >20,000 cycles (tested at 30 times per minute)

Conductive polymer (plastic) track (over twice the life of carbon tracks)

Rotation angle: 300° ±5° (Switched and Unswitched)

Operating Torque: 0.4 – 2.0 N.cm (Initial Torque may be higher)

Rotational torque of spindle can be made high or low

Detents (stop positions) Available: Centre, 11, 21, 31, 41

Permissible Axial Spindle Load: 100 N (5 Sec. maximum)

Permissible Torque at End Stop: 80 N.cm

ELECTRICAL SPECIFICATION

Rated Power Dissipation @40°C for ECO potentiometers: 0.4W linear law 0.2W nonlinear law

Rotation angle: 300° ±5°

Effective rotation - Unswitched: 243° nominal Effective rotation - Switched: 256° nominal

Insulation Resistance: >= 4 Gohms

Rated Resistance: E3 Series
 Optional: E6 Series
 Linear Law: 1K - 1M

Nonlinear Law: 4K7 - 470K

Tolerance on Rated Resistance: ± 20%

Optional Tolerance on 1K - 1M: ± 10%

Resistance Laws (Taper):

Linear: A

Nonlinear: B - Log (Audio) or C - Antilog (Reverse Audio)

Other laws: Please refer to Sales office

This information is supplied in good faith but the customer is politely reminded that it is their responsibility to check the suitability of our products for their particular application, production techniques and processes. Please note that all dimensions are for reference purposes only and, as it is the Company's policy to continuously improve our products, we reserve the right to incorporate changes without notice. Please read our terms and conditions before purchasing our products. Published March 2019



ELECTRICAL SPECIFICATION UNIQUE TO P20 POTENTIOMETERS

Effective rotation:


Without a switch: 256° nominalWith switch: 243° nominal

With rotary switch: 243° nominal

Rated Power Dissipation @40°C for P20 potentiometers:


0.4W linear law0.2W nonlinear law

P20 power dissipating curve

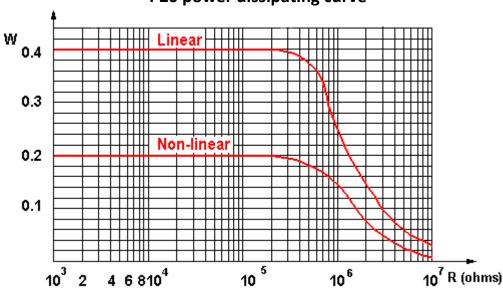

Limiting Element Voltage: 500 V DC for 20mm potentiometers


P20 maximum working voltage curve

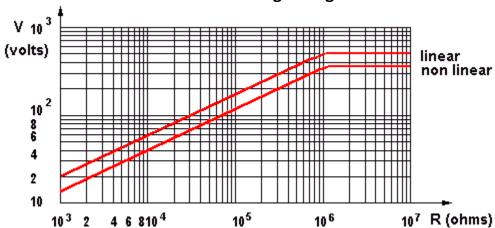

Insulating Voltage: 1000 V AC for 20mm potentiometers




Resistance law A - Linear

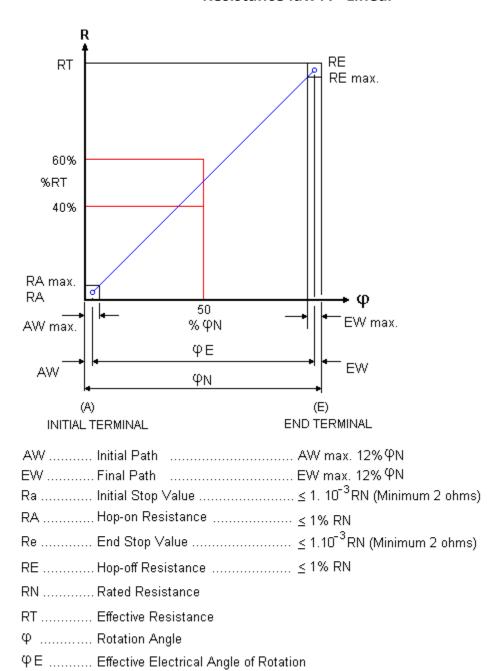

ΨΝ Effective Mechanical Angle of Rotation




Resistance law B - Log (Audio)

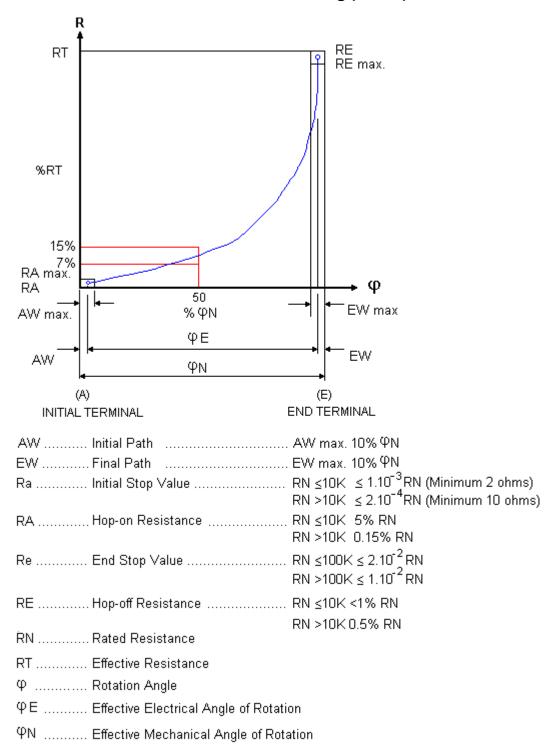



Resistance law C - Antilog (Reverse Audio)

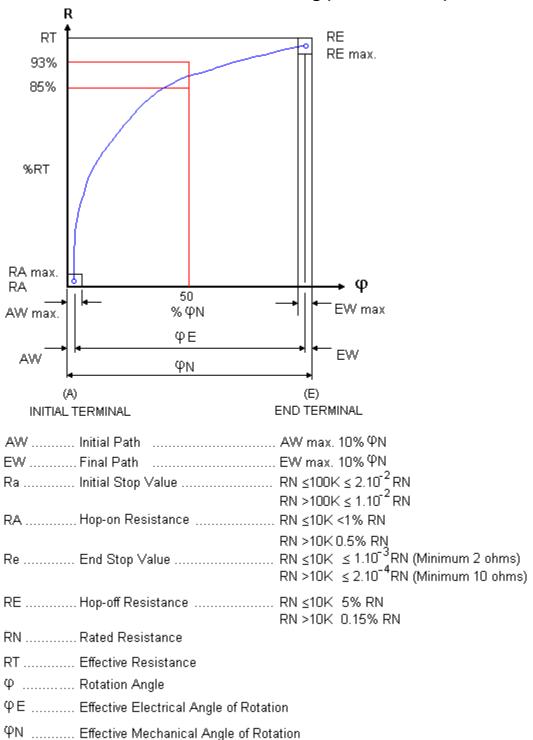




Linearity

As a basis of assessing Linearity Tolerance the independent method is the most practical, permitting as it does, the reference curve to be aligned as near as possible to the actual output curve. This avoids the use of the theoretical starting and finishing points, it is normal for the customer to realign the achieved curve with series trimmers at each end of the device if required.

Linearity Tolerance is 4% over the Nominal Resistance range of 1K0 to 1M0. The Linearity Tolerance is measured on at least 70% of the effective rotation range.

Note. In the case of Terminal and Zero-based linearity, both present constraints which increase the manufacturing difficulty and in consequence have an adverse effect on the product's price and availability.

Potentiometer linearity

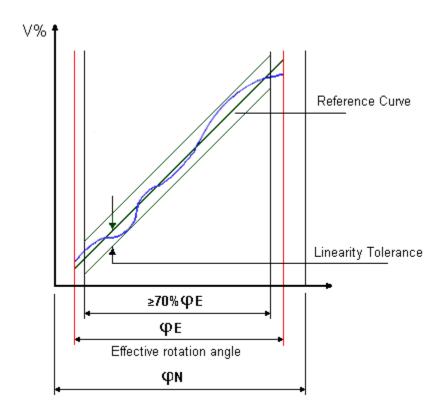


Matching Tolerance (For Tandem Stereo Potentiometers)

Tandem Potentiometers have two identical resistor units with the same variation law. The mismatching of the two resistor units, expressed in dB, is measured by the difference between the attenuations introduced by each resistor unit at various points of travel.

- Law A: 4 dB at Attenuation range 0 20 dB
- Law B and C: 3 dB at Attenuation range 0 20 dB




Matched Tolerance for Stereo



LAW	ATTENUATION RANGE	MATCHING TOLERANCE*
Α	0 - 20dB	4dB
B&C	0 - 20dB	3dB

*Matching Tolerance = 20 Log $\frac{\sqrt{1}}{\sqrt{2}}$

Operating Temperature: -25°C to +70°C

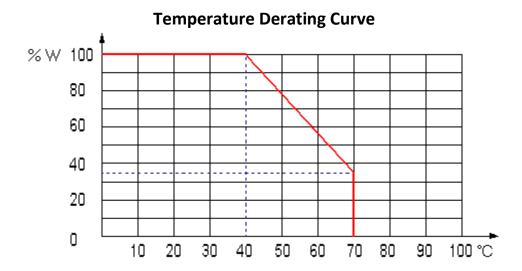

Temperature Coefficient of Resistance: +300 -500 ppm



Components


P20 Bush Housing (Mounting)

The P20 bushes are available in metal or nylon; with three thread options; and with or without a locating feature:

- Diecast Zinc Alloy
 - o M10 x0.75mm pitch (Type C)
 - M10 x0.75mm pitch, with locator (Type CEBS)
 - 9.52mm x32tpi (Type CBS)
 - 9.52mm x32tpi, with locator (Type CBSL)
 - o M7 x0.75mm pitch (Type CG)
- Glass Filled Nylon
 - M10 x0.75mm (Type CP)




DIECAST ZINC ALLOY




Type C (without locator)	
X (mm)	6
W (mm)	9

DIECAST ZINC ALLOY




Type CEBS (with locator)	
X (mm)	6
W (mm)	9



Type CBS (without locator)		
X (mm)	6	6.35
W (mm)	8 or 12	8 or 12


Type CBSL (with locator)		
X (mm)	6.35	6.35
W (mm)	8	12

GLASS FILLED NYLON



Type CP (GFN)		
X (mm)	6	6.35
W (mm)	7 or 10	7 or 10

DIECAST ZINC ALLOY



Type CG (without locator)	
X (mm)	4
W (mm)	6



P20 Spindles

The P20 spindles are plastic and fixed i.e. not removable, unless otherwise stated and they are available in three diameters:


- 6.0mm Diameter
 - Cylindrical (Type F1)
 - 4.0 x 12mm Flat (Type F2)
 - 5.0 x 15mm Flat (Type F3)
 - 5.0 x 10mm Flat (Type F4)
 - 4.6mm x 15mm Flat (Type F11)
- 4.0mm Diameter
 - Cylindrical (Type F21)
 - o 3.0 x 8.5mm Flat (Type F22)
 - o 3.0 x 13.5mm Flat (Type F23)
 - Cylindrical (Type M21 Metal)
 - 3.0 x 8.5mm Flat (Type M22 Metal)
 - 3.0 x 13.5mm Flat (Type M23 Metal)
- 6.35mm Diameter
 - Cylindrical (Type F41)
 - 5.5 x10mm Flat (Type F42)
 - 5.5 x 15mm Flat (Type F43)
- Splined Spindle 6.0mm dia. 18 teeth
- Dual Concentric
 - Flatted/Slotted (Type M15 Metal)
 - Cylindrical (Type M16 Metal)




6.0mm Diameter Spindles

Note: *Specials to customer's specification up to 65mm.

REMOVABLE SPINDLES, similar in specification to 'fixed'spindles are supplied seperate from the potentiometer. These can be indefinately taken in and out and their holding strength is >1kg.

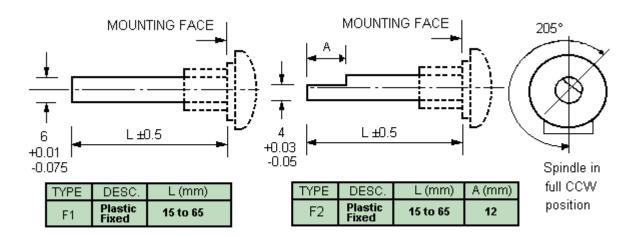

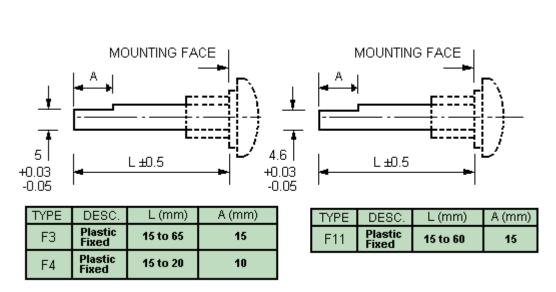




4.0mm Diameter Spindles


Note: The orientation of the flat as illustrated is for plastic spindles only.

For metal spindles, unless specified on the order, the orientation may be different on each potentiometer type.

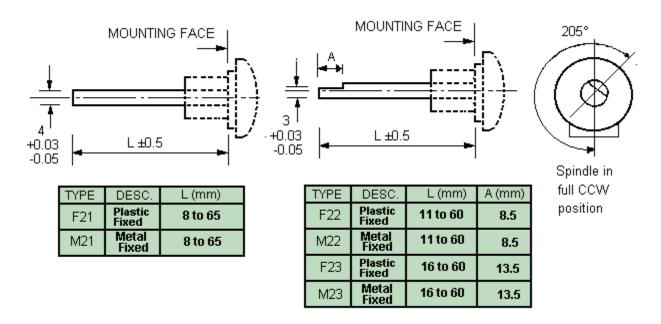

6.35mm Diameter Spindles

Note: *Specials to customer's specification up to 65mm.

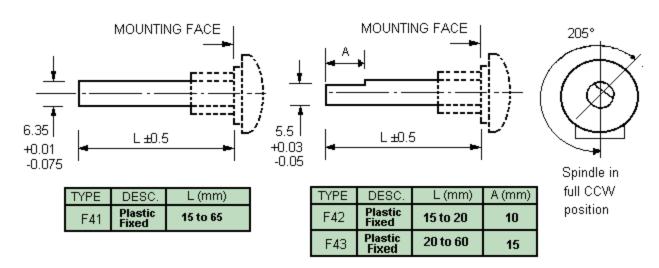



Splined Spindle - 6.0mm dia. 18 teeth

A splined form is available on the 6.0mm diameter P20 plastic spindle (F5) or alternatively a 6mm 'Splined Adaptor' (8,7mm long) can be fitted on a 4mm dia. Spindle

