

PolySwitch® PTC Devices

Overcurrent Protection Device

PRODUCT: miniSMDC050F


DOCUMENT: SCD25063 REV LETTER: I REV DATE: JULY 26,2016 PAGE NO.: 1 OF 2

Specification Status: Released

Maximum Electrical Rating Voltage: 24V_{DC}

Short Circuit Current: 100A

Notes:



Marking:



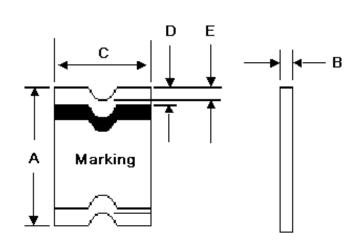


TABLE I. DIMENSIONS:

	ŀ	А		В		С		D	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
mm:	4.37	4.73	0.38	0.62	3.07	3.41	0.25	0.95	0.20
in:	(0.172)	(0.186)	(0.015)	(0.025)	(0.121)	(0.134)	(0.010)	(0.040)	(0.008)

TABLE II. PERFORMANCE RATINGS:

CURRENT RATINGS **						TIME TO	RESISTANCE		TRIPPED-STATE
						TRIP **	VALUES		POWER
								DISSIPATION**	
AMPERES		AMPERES		AMPERES		SECONDS	OHMS		WATTS AT
AT 0°C		AT 20°C		AT 60°C		AT 20°C, 8A	AT 20°C		20°C, 24V
HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	MAX	MIN	MAX*	MAX
0.55	1.10	0.50	1.00	0.35	0.70	0.15	0.15	1.00	0.8

* Maximum resistance is measured 1 hour after reflow.

**Values Specified were determined using PCB's with 0.030"X1.5 ounce copper traces.

Agency Recognition:UL, CSA, TÜVReference Documents:PS300Precedence:This specification takes precedence over documents referenced herein.Effectivity:Reference documents shall be the issue in effect on the date of invitation for bid.CAUTION:Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information





PolySwitch® PTC Devices

Overcurrent Protection Device

PRODUCT: miniSMDC050F

DOCUMENT: SCD25063 REV LETTER: I REV DATE: JULY 26,2016 PAGE NO.: 2 OF 2

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littlefuse products are not designed for, and shall not be used for, any purpose (including, without limitation, military, aerospace, medical, lifesaving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littlefuse product documentation. Warranties granted by Littlefuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littlefuse documentation. Littlefuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littlefuse as set forth in applicable Littlefuse documentation. The sale and use of Littlefuse products is subject to Littlefuse Terms and Conditions of Sale, unless otherwise agreed by Littlefuse.