
C[®]**D** TECHNOLOGIES

NMD SERIES

Isolated 1W Twin Output DC/DC Converters



FEATURES

- RoHS compliant
- Twin independent outputs
- Input/output isolation 1kVDC
- Output/output isolation 1kVDC
- Power sharing on outputs
- Efficiency to 80%
- Power density 0.85W/cm³
- UL 94V-0 package material
- Footprint from 1.17cm²
- 5V & 12V input
- One 5V output (V1)
- 3.3V, 5V, 9V, 12V and 15V output (V2)
- No heatsink required
- Internal SMD construction
- Fully encapsulated with toroidal magnetics
- No external components required
- MTTF up to 1.6 million hours
- Custom solutions available
- PCB mounting

DESCRIPTION

The NMD series of DC/DC converters are ideally suited to applications where a potential difference exists between loads, e.g. motor control circuits. The twin outputs offer cost and space savings by consolidating two DC/DC converters into one package. All of the rated power may be drawn from a single output provided the total load does not exceed 1 watt.



S	ELECTION GUID	E							
	Order Code	Nominal Input Voltage	Output Voltage 1	Output Voltage 2	Output Current 1	Output Current 2	Efficiency	MTTF ¹	Package Style
		V	V	V	mA	mA	%	kHrs	
N	IMD050503DC	5	5	3.3	100	152	70	1615	
N	IMD050505DC	5	5	5	100	100	70	1615	
N	IMD050509DC	5	5	9	100	56	80	669	DIP
N	IMD050512DC	5	5	12	100	42	80	339	
N	IMD050515DC	5	5	15	100	34	80	187	
N	IMD050503SC	5	5	3.3	100	152	70	1615	
N	IMD050505SC	5	5	5	100	100	70	1615	
N	MD050509SC	5	5	9	100	56	80	669	SIP
N	IMD050512SC	5	5	12	100	42	80	339	
N	IMD050515SC	5	5	15	100	34	80	187	
N	IMD120505DC	12	5	5	100	100	70	489	
N	IMD120509DC	12	5	9	100	56	80	343	DIP
N	IMD120512DC	12	5	12	100	42	80	229	DIP
N	IMD120515DC	12	5	15	100	34	80	148	
N	IMD120505SC	12	5	5	100	100	70	489	
N	IMD120509SC	12	5	9	100	56	80	343	SIP
N	IMD120512SC	12	5	12	100	42	80	229	SIP
N	IMD120515SC	12	5	15	100	34	80	148	

When operated **with** additional external load capacitance the rise time of the input voltage will determine the maximum external capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the additional external capacitance for reliable start up.

INPUT CHARACTERISTICS								
Parameter	Conditions	Min.	Тур.	Max.	Units			
Voltage range	Continuous operation, 5V input types	4.5	5.0	5.5	V			
vollage fallge	Continuous operation, 12V input types	10.8	12	13.2	v			

OUTPUT CHARACTERIST	TICS				
Parameter	Conditions	Min.	Тур.	Max.	Units
Rated power ²	T _A =0°C to 125°C			1.0	W
Voltage set point accuracy	See tolerance envelope				
Line regulation	High V _{IN} to low V _{IN}		1.0	1.2	%/%
	10% load to rated load, 3.3V output types			15	
	10% load to rated load, 5V output types			15	
Load regulation	10% load to rated load, 9V output types			10	%
	10% load to rated load, 12V output types			10	
	10% load to rated load, 15V output types			10	
Ripple and noise	BW=DC to 20MHz, all output types			75	mV p-p

ABSOLUTE MAXIMUM RATINGS		
Short-circuit protection ³	1 second	
Lead temperature 1.5mm from case for 10 seconds	300°C	
Input voltage V _{IN} , NMD05 types	7V	
Input voltage V _{IN} , NMD12 types	15V	

1. Calculated using MIL-HDBK-217F with nominal input voltage at full load.

2. See derating curve.

- 3. Supply voltage must be disconnected at the end of the short circuit duration.
 - All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.

NMD SERIES

Isolated 1W Twin Output DC/DC Converters

ISOLATION CHARACTERISTICS								
Parameter	Conditions	Min.	Тур.	Max.	Units			
Isolation test voltage	Flash tested for 1 second	1000			VDC			
Resistance	Viso= 500VDC	1			GΩ			

GENERAL CHARACTERISTICS							
Parameter	Conditions	Min.	Тур.	Max.	Units		
Switching frequency	All input types		100		kHz		

TEMPERATURE CHARACTERIS	STICS				
Parameter	Conditions	Min.	Тур.	Max.	Units
Specification	All output types	0		70	00
Storage		-55		150	¹ U
Cooling	Free air convection				

TOLERANCE ENVELOPE TEMPERATURE DERATING GRAPH 1.5 +10%Typical Load Line +5% Output Power (W) 0.5 70°C +2.5%VNON -2.5% **Output Voltage** 7.5% Safe Operating Area 125°C 0 -100 25 75 10 50 N 50 100 150 Output Load Current (%) Ambient Temperature (°C)

TECHNICAL NOTES

ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

C&D Technologies NMD series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 1kVDC for 1 second.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals, such as the NMD series, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.


REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The NMD series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

NMD SERIES


Isolated 1W Twin Output DC/DC Converters

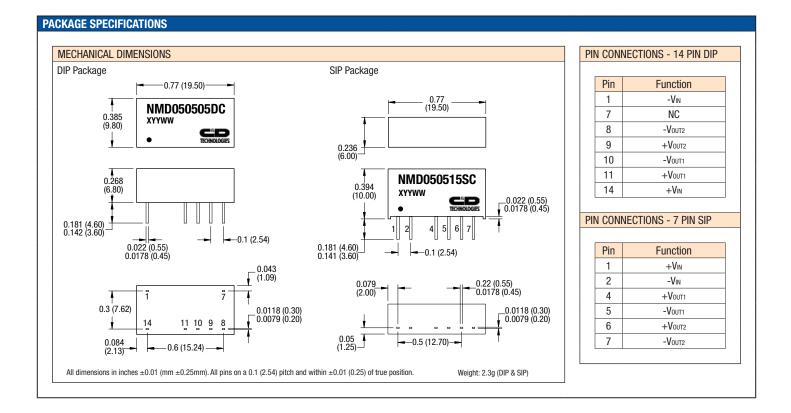




Isolated 1W Twin Output DC/DC Converters

PACKAGE SPECIFICATIONS (continued)

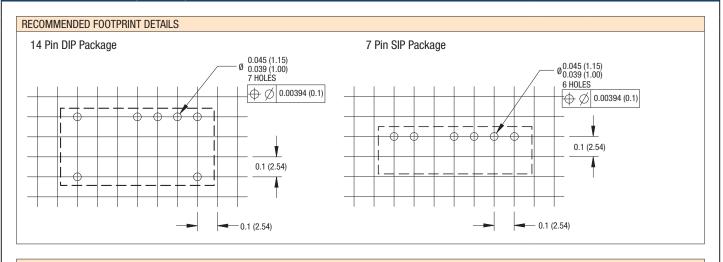

TUBE OUTLINE DIMENSIONS

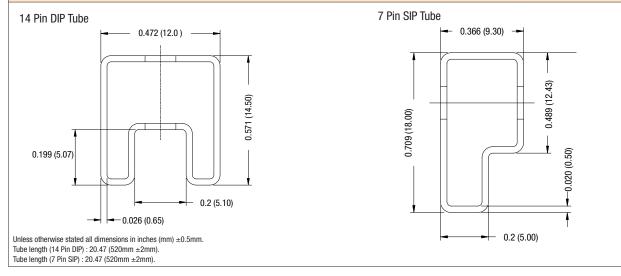

RoHS COMPLIANT INFORMATION



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The DIP types are Matte Tin over Nickel Preplate. Both types in this series are backward compatible with Sn/Pb soldering systems.

For further information, please visit www.cd4power.com/rohs

C&D Technologies (NCL) Limited reserve the right to alter or improve the specification, internal design or manufacturing process at any time, without notice. Please check with your supplier or visit our web site to ensure that you have the current and complete specification for your product before use.

© C&D Technologies (NCL) Limited 2005 KDC_NMDC.4

No part of this publication may be copied, transmitted or stored in a retrieval system or reproduced in any way including, but not limited to, photography, photocopy, magnetic or other recording means, without prior written permission from C&D Technologies (NCL) Limited. Instructions for use are available from www.cd4power.com

www.cd4power.com

C&D Technologies (NCL) Ltd Tanners Drive, Blakelands North Milton Keynes, MK14 5BU, UK

Tel: +44 (0)1908 615232 Fax: +44 (0)1908 617545 email: info@cdtechno-ncl.com **C&D Technologies, Inc.** 3400 E Britannia Drive, Tucson, Arizona 85706, USA

Tube Quantity : 25

Tel: +1 (800) 547-2537 Fax: +1 (520) 741-4598 email: pedmktg@cdtechno.com