
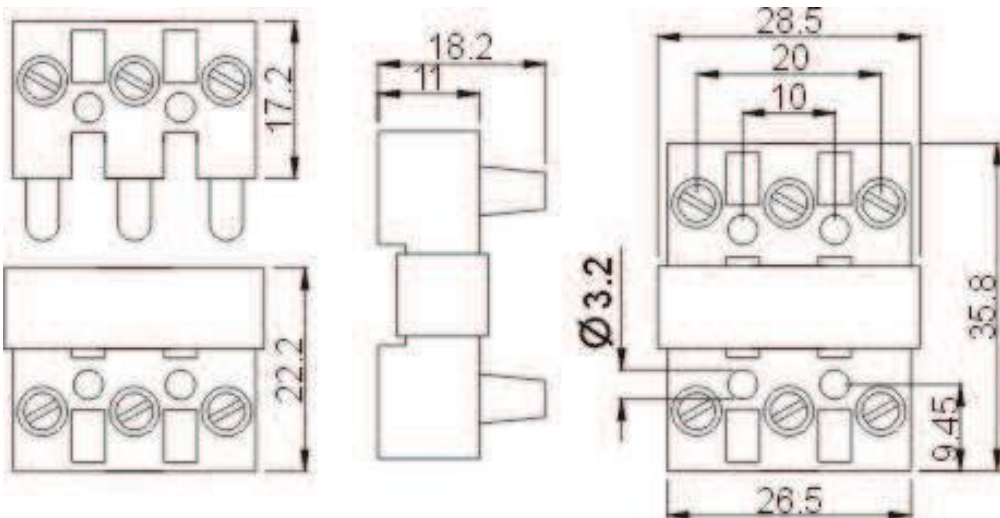



<b>APPROVAL</b>	CE	
<b>Electrical</b>	<b>UL</b>	<b>IEC</b>
Standard	300V	400V
Rated voltage	10A	16A
Rated current	22-16AWG	0.5-2.5mm <sup>2</sup>
Wire range	AC2500V/1Min	
Withstanding voltage		

<b>Menchanical</b>		
Torque	0.5Nm(4.5Lb-In.)	
Ambient temperature	-40°C ~T105 °C	
Strip length	6-7mm	
<b>Dimensions</b>		
pitch	10.0mm(.394" )	
Poles	2P-4P	

<b>Material</b>		
Housing	PA66,UL94V-2	
Screws	M3,Steel, Cr <sup>3+</sup> Zn-plated	
Current carrier	Brass,Ni-plated	

### HOW TO ORDER :

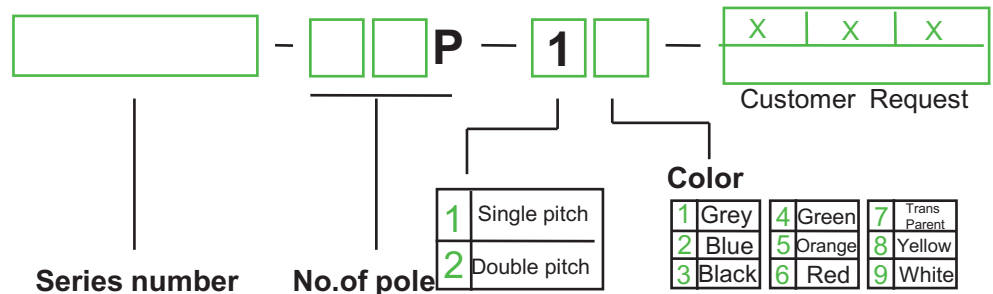

mm (INCH)	 <b>DEGSON ELECTRONICS CO., LTD.</b>
THIROANGLE PROJECTION	<b>NAME</b> <b>DG280</b>