


















### Available Headstyles

Headstyles	Diameter • Plating	
A 	1,50 • Au/Rh/Ni	
B 	1,00 • Au/Rh/Ni	
BST 	0,62 • Au/Ni	
C 	1,50 • Au/Ni	2,00 • Au
C1 	2,3/3,2 • Au	
C2S 	2,40 • Au (HTK)	
D 	1,00 • Au	1,50 • Au/Ni
D1 	0,64 • Au	
E 	1,50 • Au/Ni	
G 	1,30 • Au/Rh/Ni	1,50 • Au/Ni
H 	1,50 • Au/Rh/Ni	
K/KL4 	1,50 • Au	
M 	1,50 • Au	
M1 	1,40 • Au/Ni	
Q/QL4 	1,30 • Au/Rh/Ni	(nur Q)
	1,50 • Au/Ni	

Q5 	1,00 • Au/Ni	
V/VL4 	1,00 • Au/Ni	

### Series 1025

#### Mechanical

Spacing	<b>2,54 mm/100 mil</b>
Full travel	<b>6,30 mm</b>
Recommended working travel	<b>5,00 mm</b>
Pre-loaded spring force	<b>0,50/0,50/0,50/0,50 N</b> nur BST: <b>0,40/0,40/0,40 N</b>
Spring force at working travel (±20%)	<b>1,10/1,50/2,25/3,00 N</b> nur BST: <b>1,50/2,25/3,00 N</b>

#### Electrical

max. current rating	<b>3,0 A</b>
Typ. continuity resistance	<b>≤ 25 mOhm</b>

#### Materials

Barrel	<b>bronze, gold plated</b>
Spring	<b>spring steel, gold plated</b>
Plunger	<b>steel</b>
Receptacle	<b>bronze, gold plated</b>

#### Recommended Diameter of Drill

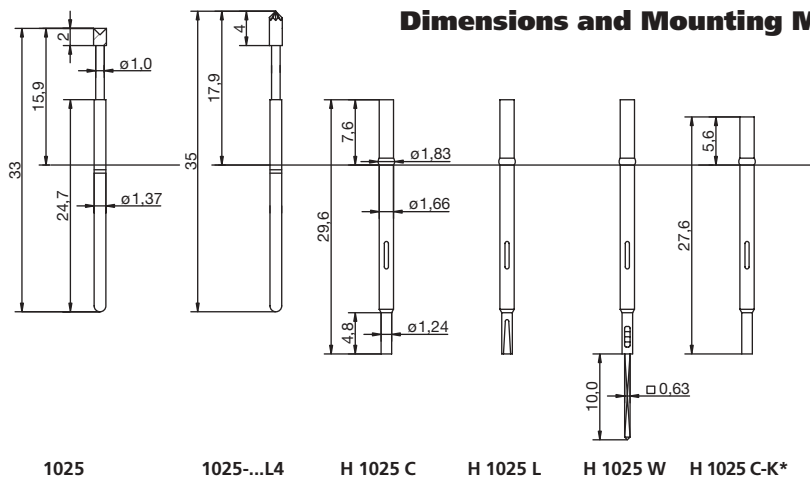
HP 2361.1 (Trolitax)	<b>1,65 mm</b>
with inserted press ring	<b>1,75 mm</b>
HGW 2372	<b>1,67 mm</b>
with inserted press ring	<b>1,76 mm</b>

### How to order:

**1025 - D - 1,5 N - Au - 1,5**

Series    Headstyle    Contact Pressure    Plating    Tip Diameter (mm)

### Dimensions and Mounting Measures



\* short version for easy-pull-off of broken pins.

Also available:  
H 1025 L-K  
H 1025 W-K