


- Features :
- Single in line package
 - 2:1 wide input range
 - 1500VDC I/O isolation
 - Built-in EMI filter without external components
 - Protections: Short circuit / Overload
 - Cooling by free air convection
 - 100% full load burn-in test
 - Low cost / High reliability
 - 2 years warranty



SPECIFICATION

ORDER NO.	SPA01A-05	SPA01B-05	SPA01C-05	SPA01A-12	SPA01B-12	SPA01C-12	SPA01A-15	SPA01B-15	SPA01C-15		
OUTPUT	DC VOLTAGE	5V			12V			15V			
	CURRENT RANGE	20 ~ 200mA			8 ~ 83mA			6 ~ 67mA			
	RATED POWER	1W									
	RIPPLE & NOISE (max.) Note.2	60mVp-p			80mVp-p			80mVp-p			
	LINE REGULATION Note.3	±0.5%									
	LOAD REGULATION Note.4	±0.5%									
	VOLTAGE ACCURACY	±2.0%									
	SWITCHING FREQUENCY	100KHz min.									
INPUT	VOLTAGE RANGE	A: 9 ~ 18VDC B: 18 ~ 36VDC C: 36 ~ 75VDC									
	EFFICIENCY (Typ.)	77%	77%	77%	78%	78%	78%	79%	79%	79%	
	DC CURRENT	Full load	A: 110mA B: 55mA C: 27mA								
		No load	A: 20mA B: 10mA C: 7mA								
	FILTER	Capacitor Type									
PROTECTION	Fuse recommended										
PROTECTION (Note. 5)	OVERLOAD	130 ~ 200% rated output power Protection type : Recovers automatically after fault condition is removed									
	SHORT CIRCUIT	All output equipped with short circuit Protection type : Recovers automatically after fault condition is removed									
ENVIRONMENT	WORKING TEMP.	-40 ~ +90°C (Refer to "Derating Curve")									
	WORKING HUMIDITY	20% ~ 90% RH non-condensing									
	STORAGE TEMP., HUMIDITY	-40 ~ +105°C, 10 ~ 95% RH									
	TEMP. COEFFICIENT	±0.05% / °C (0 ~ 50°C)									
	VIBRATION	10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes									
SAFETY	WITHSTAND VOLTAGE	I/P-O/P: 1.5KVDC									
	ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH									
	ISOLATION CAPACITANCE	80pF max.									
	EMC EMISSION	Compliance to EN55022 Class B, FCC part 15 Class B									
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8 light industry level, criteria A									
OTHERS	MTBF	500Khrs min. MIL-HDBK-217F(25°C)									
	DIMENSION	17.4*7.75*11.1mm or 0.69**0.30**0.44" inch (L*W*H)									
	WEIGHT	3g									


■ Mechanical Specification

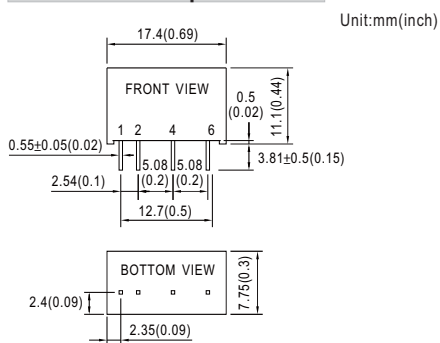

■ Pin Configuration

Pin No.	Output
1	-Vin
2	+Vin
4	+Vout
6	-Vout

■ Derating Curve

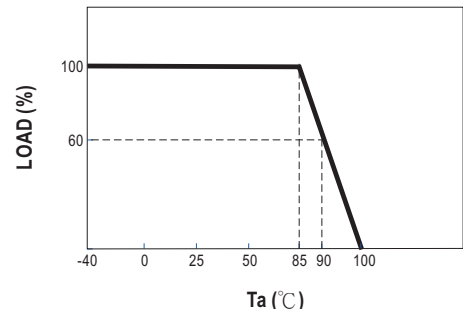

NOTE

- 1.All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
- 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
- 3.Line regulation is measured from low line to high line at rated load.
- 4.Load regulation is measured from 10% to 100% rated load.
- 5.Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds.